

CONEXA CORONA MULTI

Conexa er en varmepumpe av høyeste kvalitet til en fornuftig pris. Conexa Multi varmepumper har en effektfaktor (COP) på opptil 3.6 i klasse A. Conexa varmepumper bruker det miljøvennlige kuldemediet R410a. Taushet er gull, Conexa varmepumper er meget stillegående med et lydnivå ned mot 30dB.

Conexa varmepumper leveres med trinnløs kompressorhastighet (inverter). De er testet flere år i Norden og er tilpasset vårt vinterklima. De fleste modellene leveres med "vinterutrustning" som varmekabler etc. (Vintertest ved -13°C gir en COP på 2,2).


Det er viktig å tenke miljø, varmepumpe er et produkt som reduserer strømforbruket i de norske hjem. Med en varmepumpe kan man redusere strømkostnadene til oppvarming med opp til 50%.

Modeller:

- M20A-18HRDN1
- M30A-27HRDN1

Varmepumpe modell med 2 eller 3 innedeler

M20A-18HRDN1 har 2 innedeler
M30A-27HRDN1 har 3 innedeler

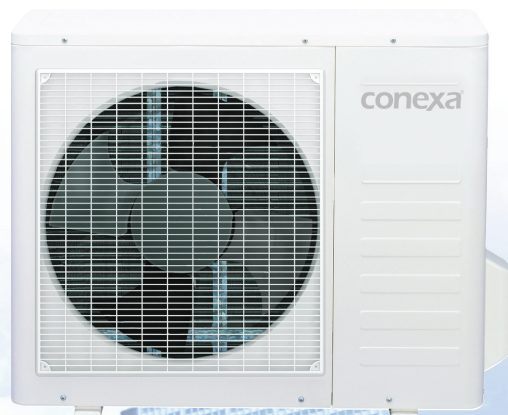

* Leveres med varmekabler ferdig montert i utedel.

Corona
Multi DC



M20A-18HRDN1



M30A-27HRDN1



● Standard ● Tillegg

Spesifikasjoner:


Forklaring: min / nominell / maks

■ Varme & kjøling


Modell			Innedel:
Kapasitet:	Kjøling/varme	kW	3.1 / 3.5
Luftmengde:		m³/t	570
Dimensjon	BxHxD	mm	710x250x195
Packing	BxHxD	mm	800x340x270
Nettovekt / totalvekt:		kg	8.0/9.5
Støynivå innedel: (Høy/Med/Lav)		dB(A)	32
Rørtilkobling - Veskeside/gasside:		mm	Ø6.35/Ø9.53

Utedel:

Modell				■ M2OA-18HRDN1	■ M3OA-27HRDN1
Strøm					
Volt, frekvens, fase		V-,Hz,Ph		220-240,50,1	220-240,50,1
Kapasitet					
Kjøling	min.-nom.-maks	Btu/h		5460 - 18080 - 22500	9380 - 26600 - 31700
	min.-nom.-maks	kW		1.6 - 5.3 - 6.6	2.7 - 7.8 - 9.3
Heating	min.-nom.-maks	Btu/h		7800 - 23500 - 25200	10700 - 30700 - 36900
	min.-nom.-maks	kW		2.3 - 6.9 - 7.4	3.1 - 9.0 - 10.8
Elektriske data					
Effekt inn	Kjøling	min.-nom.-maks	kW	0.44 - 1.58 - 2.28	0.77 - 2.39 - 3.49
	Varme	min.-nom.-maks	kW	0.58 - 1.88 - 2.47	0.82 - 2.54 - 3.66
Driftsstrøm	Kjøling	min.-nom.-maks	A	2.1 - 7.4 - 10.8	3.6 - 11.3 - 16.2
	Varme	min.-nom.-maks	A	2.5 - 8.2 - 10.7	3.5 - 11.0 - 15.9
Ytelser					
EER		W/W		3.35-A	3.26-A
COP		W/W		3.68-A	3.54-A
Dimension	WxHxD	mm		845x695x335	845x695x335
Packing	WxHxD	mm		975x772x405	975x772x405
Net/Gross Weight		kg		71/74	72/76
Outdoor air flow		m³/h		2200	2400
Outdoor noise level		dB(A)		53	55



M2OA-18HRDN1 (2 innedeler)



M3OA-27HRDN1 (3 innedeler)

Produkt:

Varenr:

Kode:

Pris:

Conexa Corona Multi 2 - 7,4 kW DC Inverter
 Conexa Corona Multi 3 - 10,8 kW DC Inverter

M2OA-18HRDN1
 M3OA-27HRDN1



Prisene er eksklusiv kuldemedieavgift.