
Riello RS VA serien

Gassbrenner for direktevarme i kanaler

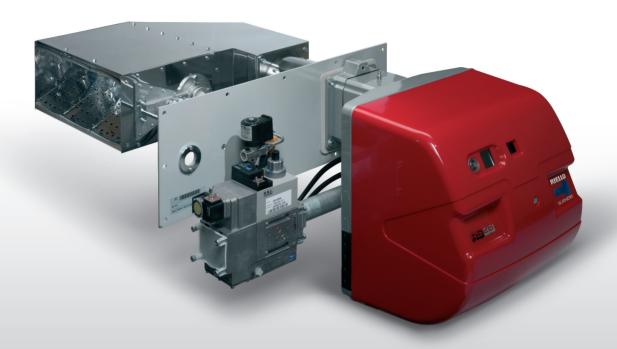

- Complete combustion at every output level thanks to a pre-adjusted air delivery system
- I Excellent flame stability and uniform combustion
- I Simple use
- Reduced flame length
- 1 Operation with natural gas and LPG without installing accessory kits
- "Ready-to-install" package
- 1 Thermal exchange efficency near to 100%
- 1 1:8 modulation ratio (optional version)
- 1 "Package" configuration "L" or "T" shape to suit to different types of applications

RS 28 VA 225 80/190-270 kW
RS 38 VA 300 90/280-360 kW
RS 50 VA 450 110/380-530 kW
RS 70 VA 600 120/550-700 kW (i utvikling)

Spesielt tilpasset:


- Korntørker
- Varme i kanaler
- Billakkeringskabiner

The new Riello Burners RS VA series of duct burners has been designed for the installation in direct heating systems with medium-low temperature levels, as the ones adopted in spray booths. This burner is particularly suitable for situation of elevated re-circulation and high air delivery variability, thanks to the dedicated fan. Moreover, the protection of the combustion head from the primary air flow avoids the settlement of impurities on the combustion module, granting long-lasting operation efficiency.



Riello RX series

Premix Low NOx Gas Burners

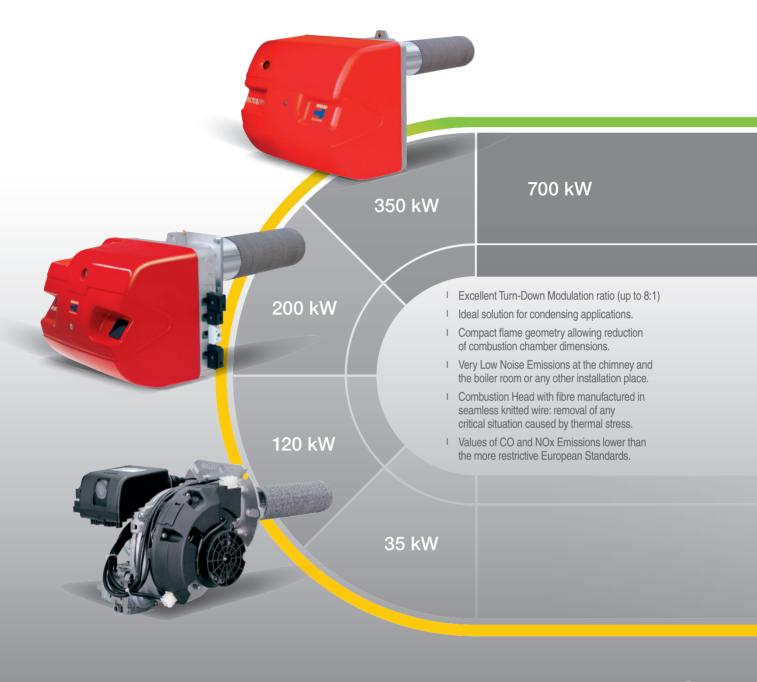



RIELLO RX Premix Gas Burners are designed to satisfy different demands in all HVAC and process applications (Boilers, Air Heaters, Furnaces, Absorption Chillers, Bakery Ovens, Grain Dryers, Spray Paint Booths, etc.). For further information contact Riello Burners Technical Dept. and ask for Riello Premix Application Book.

